

UHF TRUE DIVERSITY SINGLE CHANNEL SYSTEM

SYSTEM FEATURES

- ※ UHF 800MHz operation frequency
- ※ True diversity single channel operation.
- ※ Extreme low THD and super fidelity
- ※ Switch impact noise defeat circuit
- ※ Double squelch operation circuit, higher efficient and much more steady.
- ※ Balanced XLR and unbalanced 1/4" outputs.
- ※ EIA standard half rack plastic housing with rack ear.




KLT-9U
BODYPACK TRANSMITTER



Top View

KRU-101
TRUE DIVERSITY RECEIVER

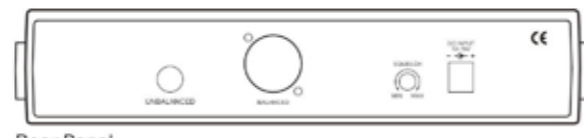

Rear Panel

19-inch Audio equipment rack



KST-3U
HANDHELD TRANSMITTER

KST-5U
HANDHELD TRANSMITTER

KRU-101 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

KRU-101



KST-3U/KST-5U



KLT-9U



RECEIVER SPECIFICATIONS

RF Frequency Range:460-970MHz
 Frequency Stabilization:10PPM
 Receiving Sensitivity:-107dBm(S/N:-12dB,15KHz)
 RF Image Spurious Rejection:>75dB
 Border Upon Channel Rejection:>90dB
 Power Requirements:13-15V DC nominal 300mA
 Dimensions :26.5x17x4.3cm

HANDHELD TRANSMITTER SPECIFICATIONS

RF Frequency Range:460-970MHz
 Frequency Stabilization:10PPM
 RF Output Power:10dBm
 RF Spurious Emission:>60dBc
 Max Deviation:>40KHz
 Battery Voltage:9V DC
 Max Drain at 9V DC:<38mA
 KST-3U Dimensions:24x5x5cm
 KST-5U Dimensions:23.5x5x5cm

BODYPACK TRANSMITTER SPECIFICATIONS

RF Frequency Range:460-970MHz
 Frequency Stabilization:10PPM
 RF Output Power:10dBm
 RF Spurious Emission:>60dBc
 Max Deviation:>40KHz
 Battery Voltage:9V DC
 Max Drain at 9V DC:<38mA
 Dimensions:8.2x6x2.3cm

HANDHELD

Receiver:KRU-101
 Handheld Mic:KST-3U OR KST-5U



LAVALIER

Receiver:KRU-101
 Bodypack Transmitter:KLT-9U
 Lavalier Mic:LT-4C



HEADWORN

Receiver: KRU-101
 Bodypack Transmitter: KLT-9U
 Headworn Mic: HT-1C



GUITAR/BASS

Receiver: KRU-101
 Bodypack Transmitter: KLT-9U
 Guitar Cable: G-05C

