

# UHF DUAL CHANNEL SYSTEM

## SYSTEM FEATURES

- ※ UHF 800MHz operation frequency
- ※ Dual channel operation
- ※ Balanced XLR and unbalanced 1/4" outputs




**PT-15**  
BODYPACK TRANSMITTER  
Top View

**HT-15**  
HANDHELD TRANSMITTER



**HT-15A**  
HANDHELD TRANSMITTER

**WR-16D**  
DUAL CHANNEL RECEIVER

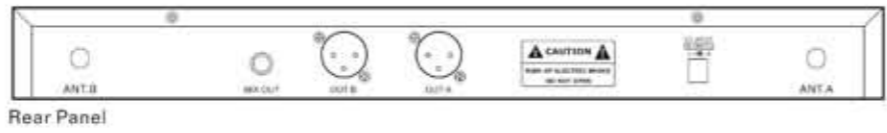

Rear Panel

# WR-16D SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

## WR-16D



## HT-15/HT-15A



## PT-15



### RECEIVER SPECIFICATIONS

RF Frequency Range: 460-970MHz  
 Image & Spurious Rejection: >70dB  
 Receiving Sensitivity: -105dBm  
 Signal/Noise Ratio: -105dB  
 Border Upon Channel Rejection >70dB  
 T.H.D.: <1%  
 Audio Output Level: 0-300mV  
 Power Requirements: 13-15V DC nominal 300mA  
 Dimensions: 42.2x23.5x4.5cm


### HANDHELD TRANSMITTER SPECIFICATIONS

RF Frequency Range: 460-970MHz  
 RF Output: >10dBm  
 Modulation Type: FM  
 Max Deviation: ±40KHz  
 Spurious Emission: >55dBc  
 Nominal Current Drain: <40mA  
 Power Requirements: 2x1.5V AA  
 HT-15 Dimensions: 23.5x5x5cm  
 HT-15A Dimensions: 25x5.1x5.1cm

### BODYPACK TRANSMITTER SPECIFICATIONS


RF Frequency Range: 460-970MHz  
 RF Output: >10dBm  
 Modulation Type: FM  
 Max Deviation: ±40KHz  
 Spurious Emission: >53dBc  
 Nominal Current Drain: <40mA  
 Power Requirements: 2x1.5V AA  
 Dimensions: 10.5x6.5x3cm

## HANDHELD

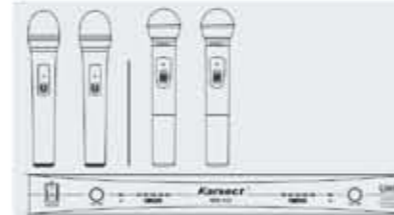


Receiver: WR-16D  
 Handheld Mic: HT-15 or HT-15A

## LAVALIER

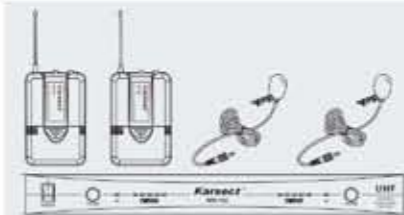

Receiver: WR-16D  
 Bodypack Transmitter: PT-15  
 Lavalier Mic: LT-4A

## HEADWORN

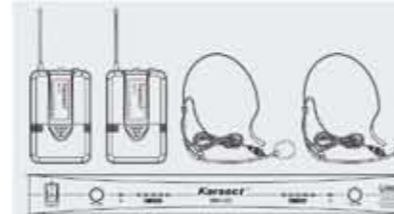


Receiver: WR-16D  
 Bodypack Transmitter: PT-15  
 Headworn Mic: HT-9A

## GUITAR/BASS



Receiver: WR-16D  
 Bodypack Transmitter: PT-15  
 Guitar Cable: G-05

## DUAL CHANNEL COMBO

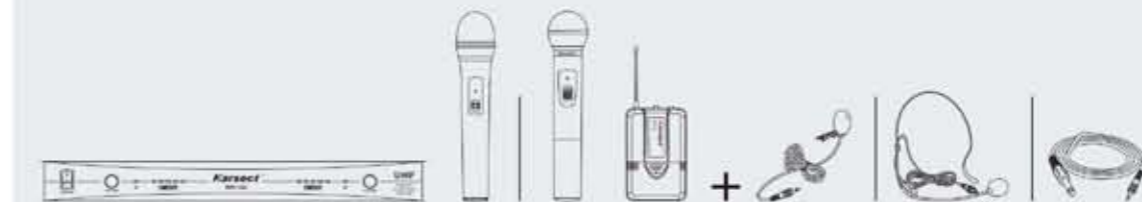

Receiver: WR-16D  
 Handheld Mic: HT-15 or HT-15A  
 Bodypack Transmitter: PT-15  
 Lavalier Mic: LT-4A  
 Headworn Mic: HT-9A  
 Guitar Cable: G-05