

# UHF ANTENNA DIVERSITY FOUR CHANNEL SYSTEM

## SYSTEM FEATURES

- ※ UHF 800MHz operating frequency.
- ※ Antenna diversity four channel operation.
- ※ Design with an eight channel antenna signal splitter inside, balance to distribute the RF signal from antenna to each receiving module evenly.
- ※ Balanced XLR and unbalanced 1/4" outputs.
- ※ Supply the power to four receiving modules independently for exclusive use.
- ※ Separate modules design in draw easily, convenient to use and easy to repair or upgrade.
- ※ EIA standard 19 inch full metal housing with rack ear.
- ※ Bodypack transmitter with a selecting switch for Lavalier/Headset/Guitarist.



# WR-400&4 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

## WR-400&4



### RECEIVER SPECIFICATIONS

RF Frequency Range:460-970MHz
Receiving Sensitivity:-105dBm(S/N:-12dB 25KHz)
Image & Spurious Rejection:>70dB
Signal/Noise Ratio:>85dB
Border Upon Channel Rejection:>70dB
T.H.D.:<0.5%
Audio Output Level:0-360mV
Power Requirements:13-15V DC 1000mA
Dimensions:48.2x19.1x4.5cm

## HT-400



### HANDHELD TRANSMITTER SPECIFICATIONS

Frequency Range: 460-970MHz
RF Output: 10dBm
Modulation Type: FM
Max Deviation: ± 40KHz
Spurious Emission: >55dBc
Nominal Current Drain:<90mA
Power Requirements: 2x1.5V AA
Dimensions: 24.5x3.9cm

## PT-400




### BODYPACK TRANSMITTER SPECIFICATIONS

Frequency Range: 460-970MHz
RF Output: 10dBm
Modulation Type: FM
Max Deviation: ± 40KHz
Spurious Emission: >53dBc
Nominal Current Drain:<90mA
Power Requirements: 2x1.5V AA
Dimensions: 6.25x10x2.2cm

## HANDHELD

Receiver:WR-400&4  
Handheld Mic:HT-400

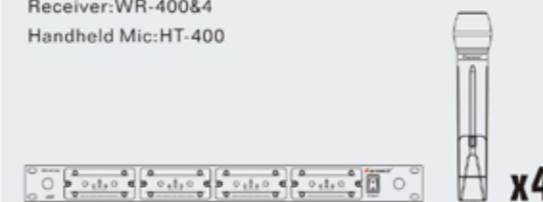

## LAVALIER

Receiver:WR-400&4  
Bodypack Transmitter:PT-400  
Lavalier Mic:LT-4C



## HEADWORN

Receiver:WR-400&4  
Bodypack Transmitter:PT-400  
Headworn Mic: HT-1C



## GUITAR/BASS

Receiver:WR-400&4  
Bodypack Transmitter:PT-400  
Guitar Cable:G-05C



## FOUR CHANNEL COMBO

