

# PLL & UHF ANTENNA DIVERSITY SINGLE CHANNEL SYSTEM

## SYSTEM FEATURES

- ※ 100 Selectable UHF channel.
- ※ Adopt the PLL-Synthesized control technic.
- ※ Antenna diversity single channel operation.
- ※ LED information display
- ※ Double squelch operation circuit, higher efficient and much more steady.
- ※ Adjustable antenna, enhance receiving signal function.
- ※ Receiver with auto-searching function.
- ※ Install with surface acoustic filter avoiding interruption from other signal and noise
- ※ Balanced XLR and unbalanced 1/4" outputs.



PLL 100CH

## WR-511 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

### WR-511



#### RECEIVER SPECIFICATIONS

Frequency Range:460-970MHz  
 Power Requirement:13-15V DC nominal 500mA  
 S/N Rqto:>90dB  
 RF Image Spurious Rejection:>80dB  
 Border Upon Channel Rejection:>80dB  
 Receiving Sensitivity:>-105dBm(S/N:-12dB 15KHz)  
 Dimensions:20x17.5x4.4cm

### HT-500



#### HANDHELD TRANSMITTER SPECIFICATIONS

Frequency Range:460-970MHz  
 RF Output:10dBm  
 Modulation Type:FM  
 Max Deviation:±68KHz  
 Spurious Emission:>55dBc  
 Power Requirements:3V (2x1.5V AA)  
 Dimensions:24x5x5cm


### PT-500



#### BODYPACK TRANSMITTER SPECIFICATIONS

Frequency Range:460-970MHz  
 RF Output:10dBm  
 Modulation Type:FM  
 Max Deviation:±68KHz  
 Spurious Emission:>55dBc  
 Power Requirements:3V(2x1.5V AA)  
 Dimensions:8.5x7x2.5cm

### HANDHELD

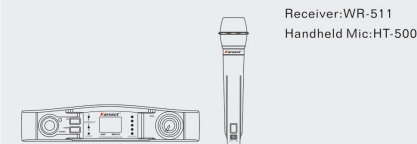

### LAVALIER



### HEADWORN



### GUITAR/BASS

