

# UHF SINGLE CHANNEL SYSTEM

## SYSTEM FEATURES

- ※ UHF 800MHz operation frequency
- ※ Single channel operation
- ※ Balanced XLR and unbalanced 1/4" outputs



# WR-15 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

## WR-15



### RECEIVER SPECIFICATIONS

RF Frequency Range:460-970MHz  
 Image & Scurious Rejection:>70dB  
 Receiving Sensitivity:-105dBm  
 Signal/Noise Ratio:-105dB  
 Border Upon Channel Rejection>70dB  
 T.H.D.:<1%  
 Audio Output Level:0-300mV  
 Power Requirements:13-15V DC nominal 200mA  
 Dimensions:17.5x13.5x4.3cm

## HT-15/HT-15A



### HANDHELD TRANSMITTER SPECIFICATIONS

RF Frequency Range: 460-970MHz  
 RF Output: >10dBm  
 Modulation Type: FM  
 Max Deviation: ±40KHz  
 Spurious Emission: >55dBc  
 Nominal Current Drain:<40mA  
 Power Requirements: 2x1.5V AA  
 HT-15 Dimensions: 23.5x5x5cm  
 HT-15A Dimensions:25x5.1x5.1cm


## PT-15



### BODYPACK TRANSMITTER SPECIFICATIONS

RF Frequency Range: 460-970MHz  
 RF Output: >10dBm  
 Modulation Type: FM  
 Max Deviation: ±40KHz  
 Spurious Emission: >53dBc  
 Nominal Current Drain: <40mA  
 Power Requirements: 2x1.5V AA  
 Dimensions: 10.5x6.5x3cm


## HANDHELD

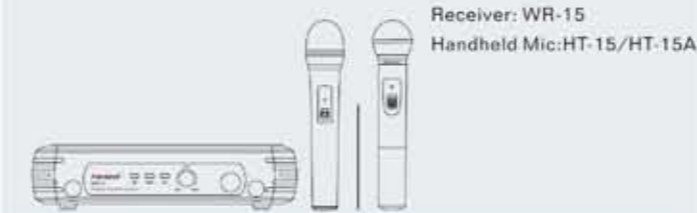

## LAVALIER



## HEADWORN

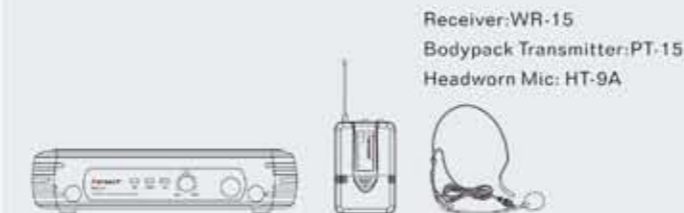

## GUITAR/BASS

