

PLL & UHF DUAL CHANNEL SYSTEM

SYSTEM FEATURES

- ※ 2x16 Selectable UHF channel
- ※ Adopt PLL-Synthesized control technic
- ※ LCD information display
- ※ Balanced XLR and unbalanced 1/4" outputs



PT-35 BODYPACK TRANSMITTER
Top View




HT-35 HANDHELD TRANSMITTER




HT-35A HANDHELD TRANSMITTER



WR-35&2 DUAL CHANNEL RECEIVER



Rechargeable Receiver



Rear Panel

PLL 16CH

WR-35&2 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

WR-35&2



RECEIVER SPECIFICATIONS

RF Frequency Range:460-970MHz
Image & Squirous Rejection:> 70dB
Receiving Sensitivity:-105dBm
Signal/Noise Ratio:-105dB
Border Upon Channel Rejection>70dB
T.H.D.<1%
Audio Output Level:0-300mV
Power Requirements:13-15V DC nominal 1000mA
Dimensions:39.6x23.5x5cm

HT-35/HT-35A



HANDHELD TRANSMITTER SPECIFICATIONS

RF Frequency Range:460-970MHz
RF Output:>10dBm
Modulation Type:FM
Max Deviation:±40KHz
Spurious Emission:>55dBc
Nominal Current Drain:<40mA
Power Requirements: 2x1.5V AA
HT-35 Dimensions: 23.5x5x5cm
HT-35A Dimensions: 25x5.1x5.1cm

PT-35



BODYPACK TRANSMITTER SPECIFICATIONS

RF Frequency Range:460-970MHz
RF Output:>10dBm
Modulation Type:FM
Max Deviation:±40KHz
Spurious Emission:>53dBc
Nominal Current Drain:<40mA
Power Requirements: 2x1.5V AA
Dimensions:10.5x6.5x3cm

HANDHELD




Receiver: WR-35&2
Handheld Mic:HT-35/HT-35A

LAVALIER



Receiver:WR-35&2
Bodypack Transmitter:PT-35
Lavalier Mic:LT-4A

HEADWORN

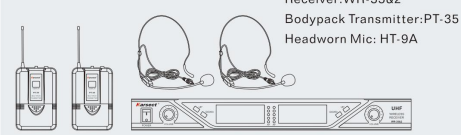

Receiver:WR-35&2
Bodypack Transmitter:PT-35
Headworn Mic: HT-9A

GUITAR/BASS



Receiver:WR-35&2
Bodypack Transmitter:PT-35
Guitar Cable:G-05

DUAL CHANNEL COMBO



Receiver: WR-35&2
Handheld Mic: HT-35/HT-35A
Body pack Transmitter: PT-35
Lavalier Mic: LT-4A
Headworn Mic: HT-9A
Guitar Cable:G-05