

# PLL & UHF ANTENNA DIVERSITY SINGLE CHANNEL SYSTEM

## SYSTEM FEATURES

- ※ 100 Selectable UHF channel.
- ※ Adopt the PLL-Synthesized control technic.
- ※ Antenna diversity single channel operation.
- ※ LCD information display
- ※ Double squelch operation circuit, higher efficient and much more steady.
- ※ Adjustable antenna, enhance receiving signal function.
- ※ Receiver with auto-searching function.
- ※ Install with surface acoustic filter avoiding interruption from other signal and noise
- ※ Balanced XLR and unbalanced 1/4" outputs.
- ※ EIA standard half rack plastic housing with rack ear.




PT-600 BODYPACK TRANSMITTER

Top View

HT-600 HANDHELD TRANSMITTER

WR-611 ANTENNA DIVERSITY RECEIVER

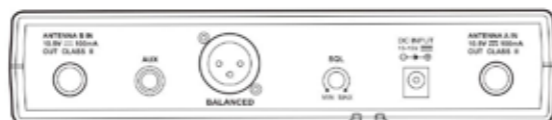

Rear Panel

PLL 100CH

## WR-611 SERIES >>>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

### WR-611



#### RECEIVER SPECIFICATIONS

Frequency Range:460-970MHz  
 Power Requirement:13-15V DC 500mA  
 S/N Ratio:>90dB  
 RF Image Spurious Rejection:>80dB  
 Border Upon Channel Rejection:>80dB  
 Receiving Sensitivity:>-105dBm(S/N:-12dB 15KHz)  
 Dimensions:20.4x16x4.5cm

### HT-600



#### HANDHELD TRANSMITTER SPECIFICATIONS

Frequency Range:460-970MHz  
 RF Output:10dBm  
 Modulation Type:FM  
 Max Deviation: ± 68KHz  
 Spurious Emission:>55dBc  
 Power Requirements:2x1.5V AA  
 Dimensions:24x5.1x5.1cm

### PT-600



#### BODYPACK TRANSMITTER SPECIFICATIONS


Frequency Range:460-970MHz  
 RF Output:10dBm  
 Modulation Type:FM  
 Max Deviation: ± 68KHz  
 Spurious Emission:>55dBc  
 Power Requirements:2x1.5V AA  
 Dimensions:6.2x7.4x2.5cm

### HANDHELD




Receiver:WR-611  
 Handheld Mic:HT-600

### LAVALIER

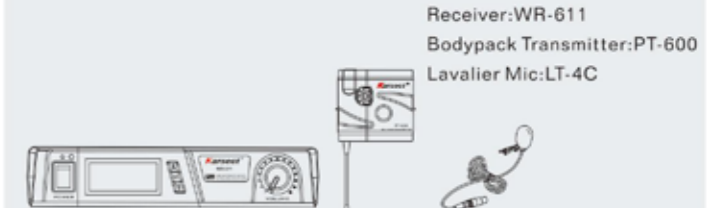


Receiver:WR-611  
 Bodypack Transmitter:PT-600  
 Lavalier Mic:LT-4C

### HEADWORN

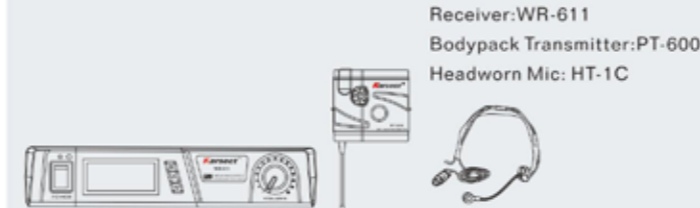

Receiver:WR-611  
 Bodypack Transmitter:PT-600  
 Headworn Mic: HT-1C

### GUITAR/BASS

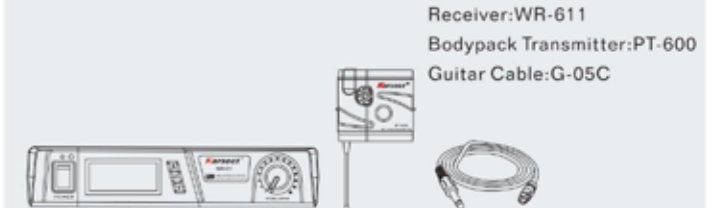

Receiver:WR-611  
 Bodypack Transmitter:PT-600  
 Guitar Cable:G-05C