

UHF DUAL CHANNEL SYSTEM


SYSTEM FEATURES

- ※ UHF 800MHz operation frequency
- ※ Dual channel operation
- ※ Extreme low THD and super fidelity
- ※ Switch impact noise defeat circuit
- ※ Double squelch operation circuit, higher efficient and much more steady.
- ※ Balanced XLR and unbalanced 1/4" outputs.
- ※ EIA standard 19 inch housing with rack ear.



KLT-8U
BODYPACK TRANSMITTER
Top View

KST-5U
HANDHELD TRANSMITTER

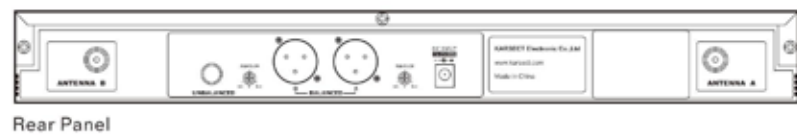

Rear Panel

KRU-208
DUAL CHANNEL RECEIVER



19-inch Audio equipment rack

KRU-208 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

KRU-208



RECEIVER SPECIFICATIONS

RF Frequency Range:460-970MHz
 Receiving Sensitivity:-105dBm(S/N:-12dB 25KHz)
 Image & Spurious Rejection:>70dB
 Signal/Noise Ratio:>85dB
 Border Upon Channel Rejection:>70dB
 T.H.D.:<0.5%
 Audio Output Level:0- ± 300mV
 Power Requirements:13-15V DC nominal 500mA
 Dimensions:39.5x19.8x4.4cm

KST-5U



HANDHELD TRANSMITTER SPECIFICATIONS

RF Frequency Range:460-970MHz
 RF Output:10dBm
 Modulation Type:FM
 Max Deviation: ± 40KHz
 Spurious Emission:>55dBc
 Nominal Current Drain:<40mA
 Power Requirements:9V DC
 Dimensions:23x5x5cm

KLT-8U



BODYPACK TRANSMITTER SPECIFICATIONS

RF Frequency Range:460-970MHz
 RF Output:10dBm
 Modulation Type:FM
 Max Deviation: ± 40KHz
 Spurious Emission:>53dBc
 Nominal Current Drain:<40mA
 Power Requirements:9V DC
 Dimensions:10.5x6.5x2.5cm

HANDHELD



Receiver:KRU-208
 Handheld Mic:KST-5U

LAVALIER



Receiver:KRU-208
 Bodypack Transmitter:KLT-8U
 Lavalier Mic:LT-4A

HEADWORN



Receiver:KRU-208
 Bodypack Transmitter:KLT-8U
 Headworn Mic: HT-9A

GUITAR/BASS



Receiver:KRU-208
 Bodypack Transmitter:KLT-8U
 Guitar Cable:G-05

DUAL CHANNEL COMBO



Receiver:KRU-208
 Handheld Mic:KST-5U
 Bodypack Transmitter:KLT-8U
 Lavalier Mic:LT-4A
 Headworn Mic: HT-9A
 Guitar Cable:G-05