

PLL & UHF DUAL CHANNEL SYSTEM

SYSTEM FEATURES

- ※ 2x1000 Selectable UHF channel.
- ※ Adopt the PLL-Synthesized control technic.
- ※ Dual channel Operation.
- ※ Advanced digital tone lock squelch.
- ※ Transfer datas to transmitter by infrared.
- ※ Soft touch controls for setup and operation.
- ※ LCD information display.
- ※ Transmitter battery life fuel gauge on receiver.
- ※ Balanced XLR and unbalanced 1/4" outputs.
- ※ EIA standard half rack plastic housing with rack ear.



ACT

① KLT-1U BODYPACK TRANSMITTER



Top View



① KST-1U HANDHELD TRANSMITTER

① KRU-2 DUAL CHANNEL RECEIVER



19-inch Audio equipment rack



Rear Panel

KRU-2 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

KRU-2



RECEIVER SPECIFICATIONS

RF Frequency Range:460-970MHz
 Receiving Sensitivity:-105dBm(S/N:-12dB 15KHz)
 Image & Spurious Rejection:>70dB
 Signal/Noise Ratio:>85dB
 Border Upon Channel Rejection:>70dB
 T.H.D.:<0.5%
 Audio Output Level:0-360mV
 Power Requirements:13-15V DC nominal 500mA
 Dimensions:22x15x4.1cm

KST-1U



HANDHELD TRANSMITTER SPECIFICATIONS

RF Frequency Range:460-970MHz
 RF Output:10dBm
 Modulation Type:FM
 Max Deviation: ± 68KHz
 Spurious Emission:>55dBc
 Nominal Current Drain:<100mA
 Power Requirements:3V DC
 Dimensions:24.2x5x5cm

KLT-1U




BODYPACK TRANSMITTER SPECIFICATIONS

RF Frequency Range:460-970MHz
 RF Output:10dBm
 Modulation Type:FM
 Max Deviation: ± 68KHz
 Spurious Emission:>53dBc
 Nominal Current Drain:<100mA
 Power Requirements:3V DC
 Dimensions:8.2x6x2.2cm

HANDHELD



LAVALIER

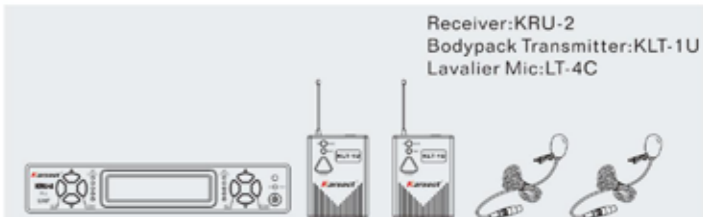

HEADWORN



GUITAR/BASS



DUAL CHANNEL COMBO

