

LAVALIER MIC SERIES >>>

LT-4




LT-5



LAVALIER MIC SPECIFICATIONS

Type:	Back Electret Condenser
Direction:	Uni-directional
Frequency Response:	8dB
Sensitivity:	44dB ± 3dB
Phantom Power Requirement:	DC1.5V 680 Ω

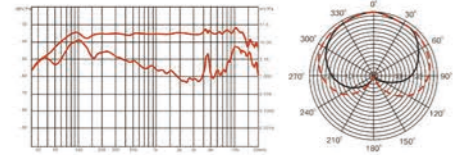

LT-6




LT-7




LAVALIER MIC SPECIFICATIONS

Polar pattern:	unidirectional
Mic diameter:	Φ 9.7x5.2 mm
Sensitivity:	-47dB ± 2dB
Frequency Range:	20-20KHz
Output Impedance:	≤ 680 Ω
SNR:	> 58dB
Standard Operation Voltage:	1.0V-10V.DC



LAVALIER MIC SPECIFICATIONS

Polar pattern:	unidirectional
Mic diameter:	Φ 9.7x5.2 mm
Sensitivity:	-47dB ± 2dB
Frequency Range:	20-20KHz
Output Impedance:	≤ 680 Ω
SNR:	> 58dB
Standard Operation Voltage:	1.0V-10V.DC



GUITAR CABLE SERIES >>>

G-05

THE GUITAR CABLE

The Guitarist is a body-pack system designed for users with electric guitars, basses, and other electric instruments



AC/DC ADAPTORS SERIES >>>



P-1 CCC APPROVED AC ADAPTOR



P-2 UL/CUL APPROVED AC ADAPTOR



P-3 GS/CE APPROVED AC ADAPTOR



P-4 SAA APPROVED AC ADAPTOR



P-5 EK APPROVED AC ADAPTOR



P-6 BS/CE APPROVED AC ADAPTOR



P-7 SWITCHING POWER SUPPLY



P-8 SWITCHING POWER SUPPLY

