


# PLL & UHF ANTENNA DIVERSITY FOUR CHANNEL SYSTEM

## SYSTEM FEATURES

- ※ 4x320 Selectable UHF channel (working in group mode).
- ※ 4x500 Selectable UHF frequencies (working in frequency mode).
- ※ Receiver set with powerful master, slaves management function.
- ※ New MENU operating mode.
- ※ Receiver with SCM signal selection.
- ※ Antenna diversity four channel receiver.
- ※ Design with an eight channel antenna signal splitter inside, balance to distribute the RF signal from antenna to each receiving module evenly.
- ※ Digital pilot technique to enhance the system antijamming.
- ※ Balanced XLR and unbalanced 1/4" outputs.
- ※ Available to make the receiver connection by manual or infrared.
- ※ EIA standard 19 inch full metal housing with rack ear.
- ※ Estimate the transmitter battery operating life on receiver.
- ※ Bodypack transmitter with a selecting switch for Lavalier/Headset/Guitarist.

**ACT**

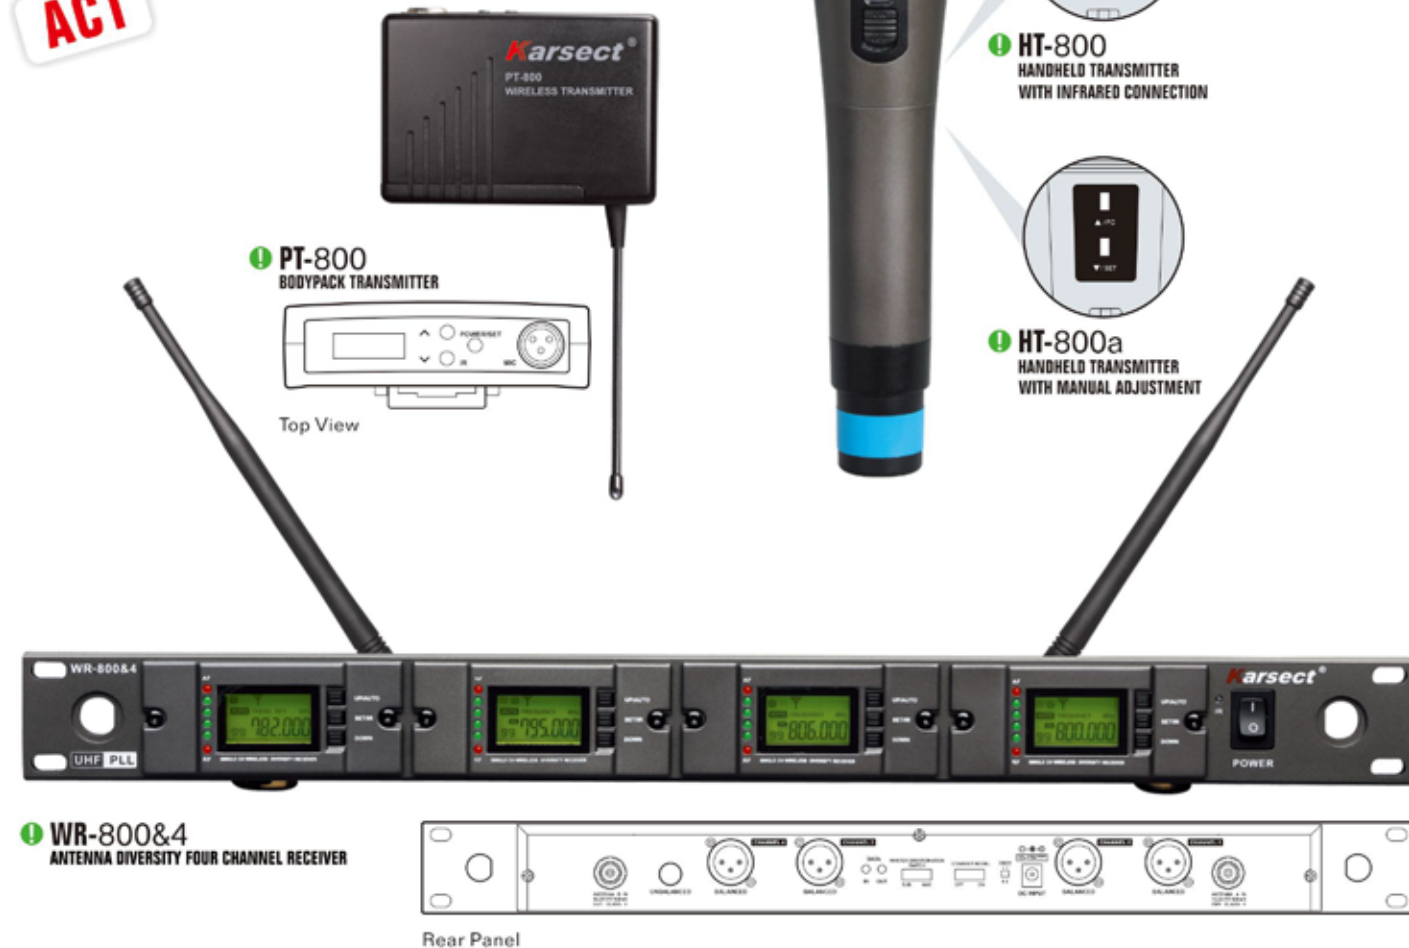

# WR-800&4 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

## WR-800&4



### RECEIVER SPECIFICATIONS

Frequency Range: 460-970MHz  
 Power Requirement: 13-15V DC 1000mA  
 S/N Ratio: >90dB  
 RF Image Spurious Rejection: >80dB  
 Border Upon Channel Rejection: >80dB  
 Receiving Sensitivity: >-105dBm(S/N: -12dB 15KHz)  
 Dimensions: 48.2x19.1x4.5cm

## HT-800/HT-800a



### HANDHELD TRANSMITTER SPECIFICATIONS

Frequency Range:460-970MHz  
 RF Output:10dBm  
 Modulation Type:FM  
 Max Deviation: ± 68KHz  
 Spurious Emission:>55dBc  
 Power Requirements:1x1.5V AA  
 Dimensions:23.6x4.8cm

## PT-800



### BODYPACK TRANSMITTER SPECIFICATIONS

Frequency Range:460-970MHz  
 RF Output:10dBm  
 Modulation Type:FM  
 Max Deviation: ± 68KHz  
 Spurious Emission:>55dBc  
 Power Requirements:1x1.5V AA  
 Dimensions:7.8x2.2x5.4cm

## HANDHELD

Receiver:WR-800&4  
 Handheld Mic:HT-800/HT-800a



## LAVALIER

Receiver:WR-800&4  
 Bodypack Transmitter:PT-800  
 Lavalier Mic:LT-4C



## HEADWORN

Receiver:WR-800&4  
 Bodypack Transmitter:PT-800  
 Headworn Mic:HT-1C



## GUITAR/BASS

Receiver:WR-800&4  
 Bodypack Transmitter:PT-800  
 Guitar Cable:G-05C



## FOUR CHANNEL COMBO

