


PLL & UHF ANTENNA DIVERSITY SINGLE CHANNEL SYSTEM

SYSTEM FEATURES

- ※ 256 Selectable UHF channel (working in group mode).
- ※ 500 Selectable UHF frequencies (working in frequency mode).
- ※ New MENU operating mode.
- ※ Receiver with SCM signal selection.
- ※ Antenna diversity single channel operation.
- ※ Digital pilot technique to enhance the system antijamming.
- ※ Balanced XLR and unbalanced 1/4" outputs.
- ※ Available to make the receiver connection by manual or infrared.
- ※ EIA standard half rack full metal housing with rack ear.
- ※ Estimate the transmitter battery operating life on receiver.
- ※ Bodypack transmitter with a selecting switch for Lavalier/Headset/Guitarist.

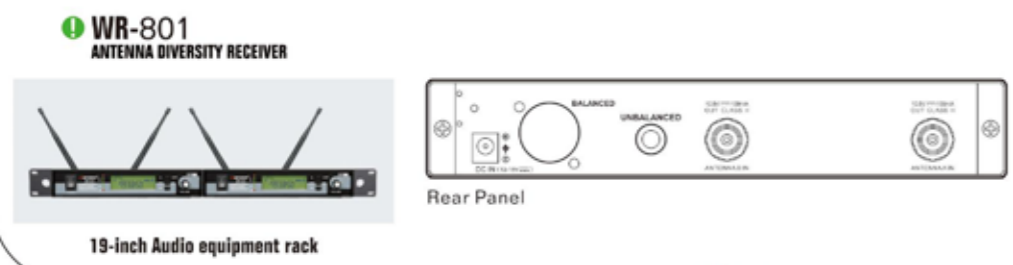

WR-801 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

| WR-801 | HT-801/HT-801a | PT-801 |
|---|--|---|
| | | |
| RECEIVER SPECIFICATIONS Frequency Range:460-970MHz Power Requirement:13-15V DC 500mA S/N Ratio:>90dB RF Image Spurious Rejection:>80dB Border Upon Channel Rejection:>80dB Receiving Sensitivity:>-105dBm(S/N:-12dB 15KHz) Dimensions:20.6x10.3x4cm | HANDHELD TRANSMITTER SPECIFICATIONS Frequency Range:460-970MHz RF Output:10dBm Modulation Type:FM Max Deviation: ± 68KHz Spurious Emission:>55dBc Power Requirements:1x1.5V AA Dimensions:23.6x4.8cm | BODYPACK TRANSMITTER SPECIFICATIONS Frequency Range:460-970MHz RF Output:10dBm Modulation Type:FM Max Deviation: ± 68KHz Spurious Emission:>55dBc Power Requirements:1x1.5V AA Dimensions:7.8x2.2x5.4cm |

| HANDHELD | LAVALIER |
|--|---|
| <p>Receiver:WR-801 Handheld Mic:HT-801/HT-801a</p> | <p>Receiver:WR-801 Bodypack Transmitter:PT-801 Lavalier Mic:LT-4C</p> |
| HEADWORN | GUITAR/BASS |
| <p>Receiver:WR-801 Bodypack Transmitter:PT-801 Headworn Mic: HT-1C</p> | <p>Receiver:WR-801 Bodypack Transmitter:PT-801 Guitar Cable:G-05C</p> |