

PLL & UHF ANTENNA DIVERSITY DUAL CHANNEL SYSTEM

SYSTEM FEATURES

- ※ 2x16 Selectable UHF channel.
- ※ Adopt the PLL-Synthesized control technic.
- ※ Antenna diversity dual channel operation.
- ※ LED information display
- ※ Double squelch operation circuit, higher efficient and much more steady.
- ※ Adjustable antenna, enhance receiving signal function.
- ※ Receiver with auto-searching function.
- ※ Install with surface acoustic filter avoiding interruption from other signal and noise
- ※ Balanced XLR and unbalanced 1/4" outputs.
- ※ EIA standard 19 inch metal housing with rack ear.



PLL 16CH

KRU-4 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

KRU-4	KST-6U	KLT-6U	G-10H
RECEIVER SPECIFICATIONS	HANDHELD TRANSMITTER SPECIFICATIONS	BODYPACK TRANSMITTER SPECIFICATIONS	RECHARGEABLE TABLE STAND SPECIFICATIONS
Frequency Range:460-970MHz	Frequency Range:460-970MHz	Frequency Range:460-970MHz	Power Requirement:DC 12V
Power Requirement: 13-15V DC nominal 800mA	RF Output:10dBm	RF Output:10dBm	Recharging Time:Not less than 4 hours
S/N Ratio:>90dB	Modulation Type:FM	Modulation Type:FM	Dimensions:16.5x8.5x9cm
RF Image Spurious Rejection:>80dB	Max Deviation: ± 68KHz	Max Deviation: ± 68KHz	
Border Upon Channel Rejection:>80dB	Spurious Emission:>55dBc	Spurious Emission:>55dBc	
Receiving Sensitivity: > -105dBm(S/N:-12dB 15KHz)	Power Requirements:3V (2x1.5V AA)	Power Requirements:3V(2x1.5V AA)	
Dimensions:48.31x21.3x4.3cm	Dimensions:24.2x5x5cm	Dimensions:8.3x6.7x2.5cm	

HANDHELD



Receiver:KRU-4
Handheld Mic:KST-6U



LAVALIER



Receiver:KRU-4
Bodypack Transmitter:KLT-6U
Lavalier Mic:LT-4C



HEADWORN



Receiver:KRU-4
Bodypack Transmitter:KLT-6U
Headworn Mic: HT-1C




GUITAR/BASS



Receiver:KRU-4
Bodypack Transmitter:KLT-6U
Guitar Cable:G-05C



DUAL CHANNEL COMBO

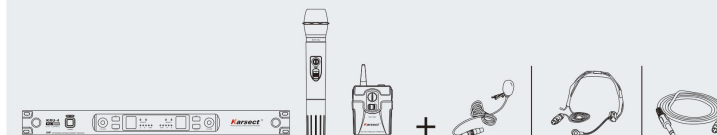

Receiver:KRU-4
Handheld Mic:KST-6U
Bodypack Transmitter:KLT-6U
Lavalier Mic:LT-4C
Headworn Mic: HT-1C
Guitar Cable:G-05C