

PLL & UHF ANTENNA DIVERSITY DUAL CHANNEL SYSTEM

SYSTEM FEATURES


- ※ 2x100 Selectable UHF channel.
- ※ Adopt the PLL-Synthesized control technic.
- ※ Antenna diversity dual channel operation.
- ※ LCD information display
- ※ Double squelch operation circuit, higher efficient and much more steady.
- ※ Adjustable antenna, enhance receiving signal function.
- ※ Receiver with auto-searching function.
- ※ Install with surface acoustic filter avoiding interruption from other signal and noise
- ※ Balanced XLR and unbalanced 1/4" outputs.
- ※ EIA standard half rack plastic housing with rack ear.



PT-700
BODYPACK TRANSMITTER
Top View

WR-720
ANTENNA DIVERSITY RECEIVER

HT-700
HANDHELD TRANSMITTER

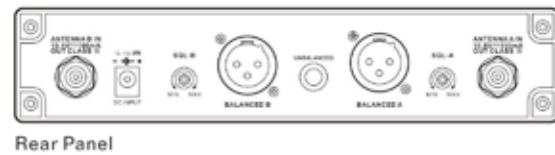

PLL 100CH

WR-720 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

WR-720



RECEIVER SPECIFICATIONS

Frequency Range:460-970MHz
 Power Requirement:13-15V DC 800mA
 S/N Ratio:>90dB
 RF Image Spurious Rejection:>80dB
 Border Upon Channel Rejection:>80dB
 Receiving Sensitivity:
 >-105dBm(S/N:-12dB 15KHz)
 Dimensions:20.5x17.6x4.5cm

HT-700



HANDHELD TRANSMITTER SPECIFICATIONS

Frequency Range:460-970MHz
 RF Output:10dBm
 Modulation Type:FM
 Max Deviation: ± 68KHz
 Spurious Emission:>55dBc
 Power Requirements:2x1.5V AA
 Dimensions:23.7x4.8x4.8cm

PT-700



BODYPACK TRANSMITTER SPECIFICATIONS

Frequency Range:460-970MHz
 RF Output:10dBm
 Modulation Type:FM
 Max Deviation: ± 68KHz
 Spurious Emission:>55dBc
 Power Requirements:2x1.5V AA
 Dimensions:8.5x6.2x2.2cm


C-700H




RECHARGEABLE TABLE STAND

Power Requirement:DC 12V
 Recharging Time:Not less than 4 hours
 Dimensions:18.8x12.3x9.1cm


HANDHELD

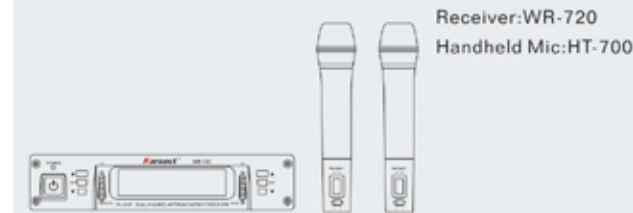


LAVALIER

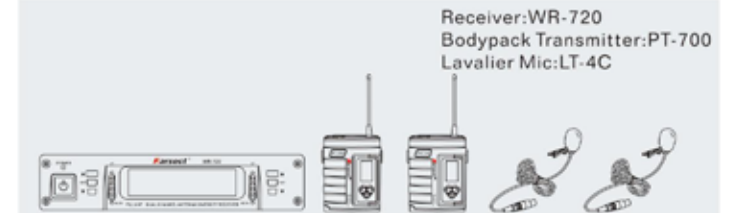

HEADWORN

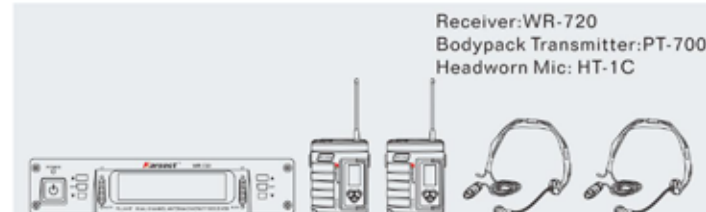

GUITAR/BASS

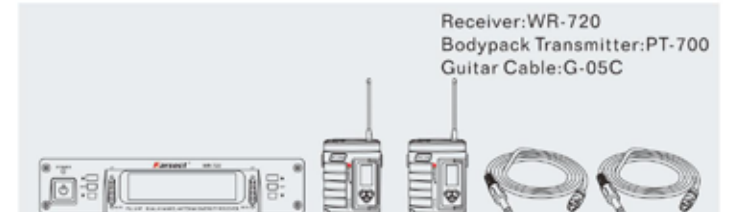

DUAL CHANNEL COMBO

