

# PLL & UHF ANTENNA DIVERSITY SINGLE CHANNEL SYSTEM

## SYSTEM FEATURES

- ※ 48 Selectable UHF channel.
- ※ Adopt the PLL-Synthesized control technic.
- ※ Antenna diversity single channel operation.
- ※ LCD information display
- ※ Double squelch operation circuit, higher efficient and much more steady.
- ※ Adjustable antenna, enhance receiving signal function.
- ※ Receiver with auto-searching function.
- ※ Install with surface acoustic filter avoiding interruption from other signal and noise
- ※ Balanced XLR and unbalanced 1/4" outputs.
- ※ EIA standard half rack plastic housing with rack ear.



**KLT-7U**  
BODYPACK TRANSMITTER



**KRU-481**  
ANTENNA DIVERSITY RECEIVER



19-inch Audio equipment rack



Rear Panel

**KST-7U**  
HANDHELD TRANSMITTER


## PLL 48CH

# KRU-481 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

KRU-481	KST-7U	KLT-7U	C-10H
<b>RECEIVER SPECIFICATIONS</b>	<b>HANDHELD TRANSMITTER SPECIFICATIONS</b>	<b>BODYPACK TRANSMITTER SPECIFICATIONS</b>	<b>RECHARGEABLE TABLE STAND</b>
Frequency Range:460-970MHz Power Requirement: 13-15V DC nominal 500mA S/N Ratio:>90dB RF Image Spurious Rejection:>80dB Border Upon Channel Rejection:>80dB Receiving Sensitivity: >-105dBm(S/N:-12dB 15KHz) Dimensions:22x15x4.1cm	Frequency Range:460-970MHz RF Output:10dBm Modulation Type:FM Max Deviation: ± 68KHz Spurious Emission:>55dBc Power Requirements:3V (2x1.5V AA) Dimensions:24.5x5x5cm	Frequency Range:460-970MHz RF Output:10dBm Modulation Type:FM Max Deviation: ± 68KHz Spurious Emission:>55dBc Power Requirements:3V(2x1.5V AA) Dimensions:8.3x6.7x2.5cm	Power Requirement:DC 12V Recharging Time:Not less than 4 hours Dimensions:16.5x8.5x9cm

### HANDHELD

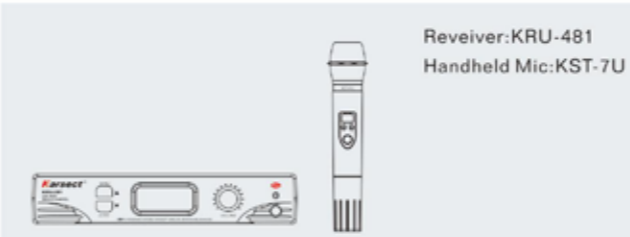

### LAVALIER



### HEADWORN



### GUITAR/BASS

